


NE RG 34/50/65 Rinse Gum



Standard Equipment includes:-

- Fully automatic, rinsing, finishing and drying
- Automatic finisher, recirculation and replenishment
- Adjustable speed control
- Opto sensor operated process timing


NES Worldwide Ltd (UK)

Unit 4-8 Napier Place Stephenson Way Industrial Estate
Thetford Norfolk IP24 3RL
Tel: 01842 765128 Fax: 01842 765267
e-mail: info@nesworldwide.com

NES Worldwide Inc (USA)

3, Progress Avenue
Westfield, MA 01085
Tel: 413 562 8000 Fax: 413 564 0281
e-mail: info@nesworldwide.com

NE RG 34/50/65 Rinse Gum Specifications

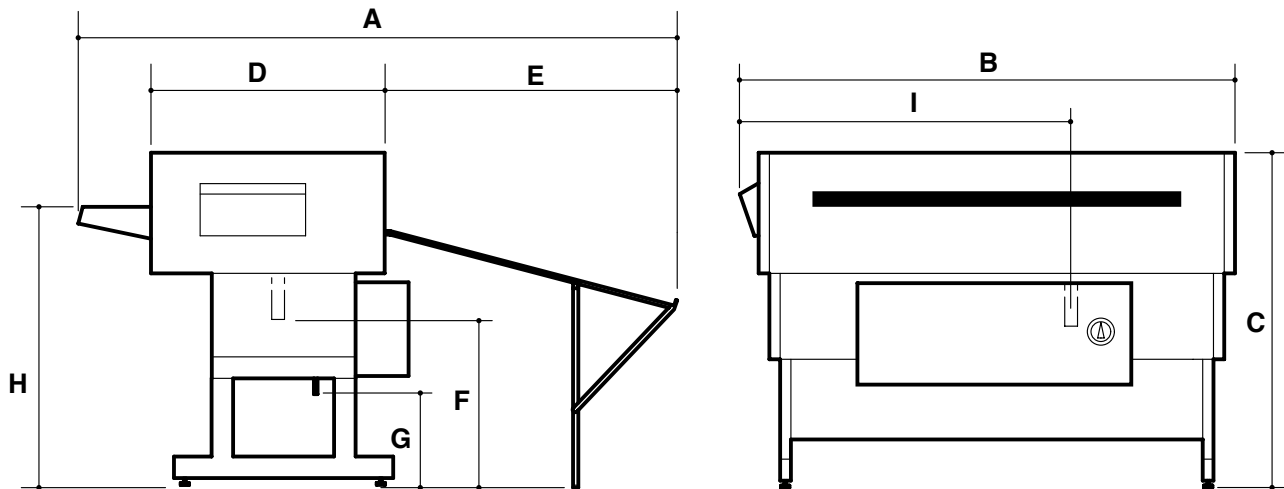

Specifications subject to change without notice.

MODEL	NE RG 34	NE RG 50	NE RG 65
Dimensions			
A	83.5" (2120mm)	99.8" (2536mm)	115.8" (2947mm)
B	58.5" (1485mm)	75.6" (1920mm)	92.1" (2340mm)
C	41.6" (1055mm)	44.0" (1120mm)	44.0" (1120mm)
D	25.0" (630mm)	27.3" (694mm)	27.3" (694mm)
E	44.0" (1120mm)	58.4" (1484mm)	80.0" (2034mm)
F	23.0" (585mm)	23.0" (585mm)	23.0" (585mm)
G	17.5" (450mm)	17.5" (450mm)	17.5" (450mm)
H	35.4" (900mm)	36.9" (938mm)	36.9" (938mm)
I	40.0" (1015mm)	39.1" (994mm)	39.1" (994mm)
Net weight	440lbs (200Kgs)	662lbs (300Kgs)	770lbs (350 kgs)
Plates (type)	Single sided conventional or thermal plates		
Maximum plate width	34.0" (846mm)	52.0" (1320mm)	65.0" (1650mm)
Minimum plate length	11.0" (280mm)	15.0" (380mm)	15.0" (380mm)
Finisher	As recommended by plate and chemical representative		
Finisher capacity	1US gallons (3.5 litres)	1.5US gallons (5.7 litres)	2US gallons (7.5 litres)
Water Consumption	2 US gallons (7.5 litres) per minute when processing		
Water Supply	¾" GH (Male) or ½" NPT Male adaptor supplied		
Waste	1½" NPT (Male)		
Electrical Requirement	Voltage Dedicated 220VAC single phase 50/60 Hz, 20 Amp		

NES Worldwide Ltd (UK)

Unit 4-8 Napier Place Stephenson Way Industrial Estate
 Thetford Norfolk IP24 3RL
 Tel: 01842 765128 Fax: 01842 765267
 e-mail: info@nesworldwide.com

NES Worldwide Inc (USA)

3, Progress Avenue
 Westfield, MA 01085
 Tel: 413 562 8000 Fax: 413 564 0281
 e-mail: info@nesworldwide.com