

NE3440CTP, NE4860CTP, NE6065 VLF

Plate Stacking Systems

The NES full line of flexible, reliable plate stacking systems speeds workflow for all printers working in both digital and conventional platemaking environments.

This fully-automatic line of plate stackers is one of many advanced plate-handling solutions offered by NES Worldwide. Call us, or visit our web site at www.nesworldwide.com to learn how our expert staff can help put the right system—at the right price—into your print shop.



Standard Equipment Includes:

- Fully-automatic plate stacking
- Supports plates of multiple gauges: 0.005 – 0.020"
- Solid steel construction for reliable operation
- Electrical CUL® tested and certified
- Made in USA
- Fully adjustable conveyor with dual speeds
- Adjustable height accommodates leading vendor processors
- Three models provide a full range of stackers for all printers
- Plate trolley facilitates transfer of plates from prepress to press room



Worldwide Presence. Local Attention.

NE3440, NE4860, NE6065

Plate Stacking System



Specifications:


NES Worldwide is dedicated to providing products and services that will speed your workflow. Our full range of plate stackers automates the task of handling plates as they exit your plate processing system. Solid and reliable, all units in this product line are constructed of the highest quality materials. Our plate stackers operate in demanding production environments and without the intervention of your staff—maximizing productivity and throughput.

Our family of highly flexible plate stacking devices can accommodate plates of varying sizes. With a modest footprint and modular stacking trolley, the systems securely abut your conventional or digital plate processor, making it an ideal solution for busy prepress environments. Perfect for overnight or unattended operation, these plate stackers free your staff to work on other—more pressing—tasks.

For automated plate handling that will speed your workflow and maximize productivity, our family of plate stacking systems is an excellent addition to your plate-handling solution.

Installation, Service, Parts, Sales, Refurbishment

The team at NES Worldwide is dedicated to one goal: making your business run smoothly. We offer straightforward, expedient, customized solutions to all of your plate-handling requirements – from new and refurbished equipment, to service, parts and installation.

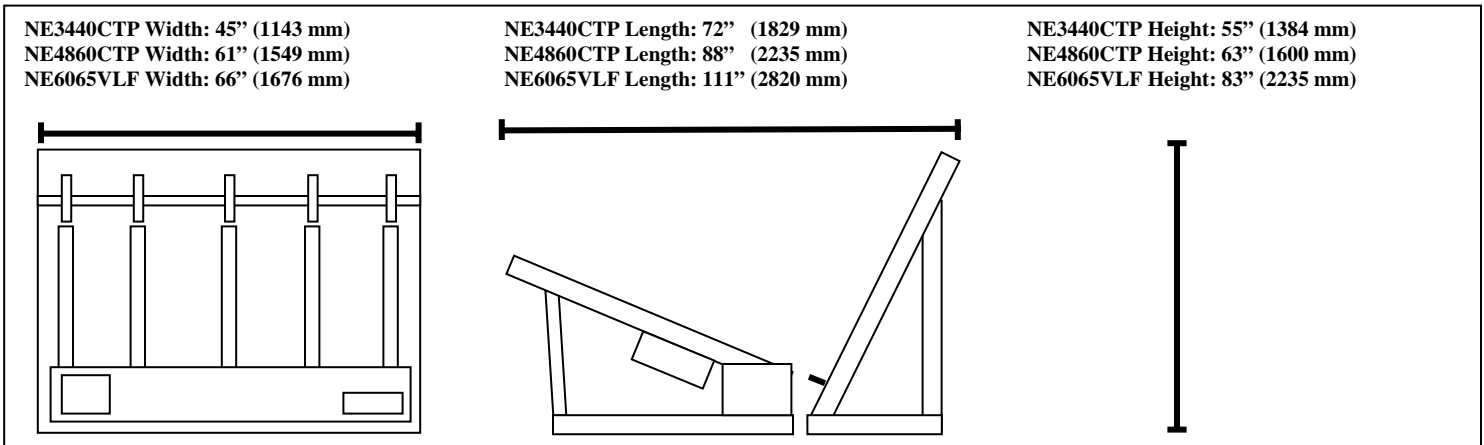

Individual Specifications per Unit

	NE3440CTP	NE4860CTP	NE6065VLF
Maximum plate width	40" (1016 mm)	60" (1525 mm)	63" (1600 mm)
Maximum plate length	52" (1321 mm)	62" (1575 mm)	83" (2108 mm)
Footprint	45" x 72" (1143 x 1829 mm)	61" x 88" (1549 x 2235 mm)	66" x 111" (1676 x 2820 mm)
Weight	230 lb (105 kg)	280 lb (127 kg)	350 lb (159 kg)

Specifications for all Units

Maximum plate thickness	0.020" (0.508 mm)
Minimum plate thickness	0.005" (0.127 mm)
Capacity	Up to 100 plates
Adjustable height	29" to 34.5" (737 to 876 mm)
Electrical requirements	220/240 V, 50/60 Hz, 15 A - All units are electrical UL® and CUL® tested and certified.
Options	Additional plate trolley(s), 110 V electrical system



Worldwide presence.
Local attention.

NES Worldwide Inc.

3 Progress Avenue
 Westfield, MA 01085, USA
 Telephone: 1 413 562 8000
 Fax: 1 413 564 0281
 E-mail: info@NESworldwide.com

NES Worldwide Ltd.

Unit 4-6 Napier Place
 Stephenson Way Industrial Estate
 Thetford, Norfolk IP24 3RL, UK
 Telephone: 44 (0) 1842 765128
 Fax: 44 (0) 1842 765267
 E-mail: info@NESworldwide.com